


# SS - 64 To Yaesu FT-208/708 Handheld

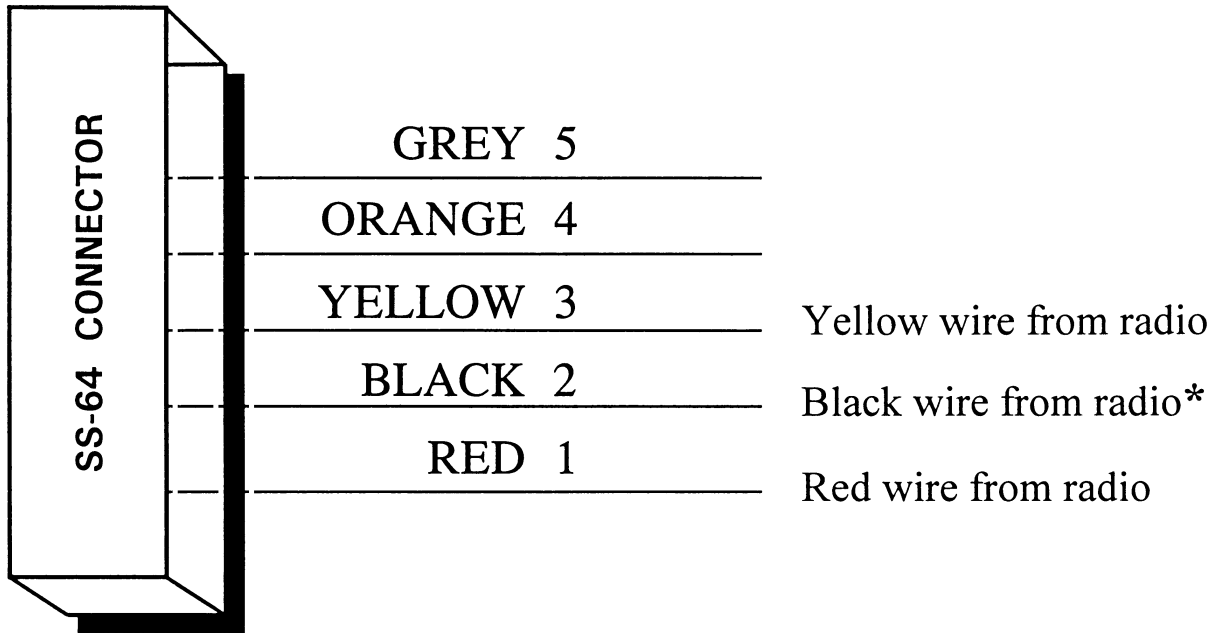

Notes: \* If you want to turn the encoder on and off, use the violet wire in the radio instead of the black wire for the ground connection. This will allow the encoder to be turned on or off with the tone switch on the squelch control

Also attached to this instruction sheet is a pre-wired connector for the SS-64 with male amp pins attached to the flying leads. The amp pins will mate to the female amp connectors attached to the wires inside the radio. Attached as indicated above.

On some models of the FT-208R/708R (earlier versions), no wiring for CTCSS tone exists. Some models have a small white plug with three wires attached for encode only. In this case, the normal SS-64 connector will need to be used.



**COMMUNICATIONS SPECIALISTS, INC.**

426 WEST TAFT AVENUE • ORANGE, CA 92865-4296

(714) 998-3021 • FAX (714) 974-3420

Entire U.S.A. (800) 854-0547 • FAX (800) 850-0547

<http://www.com-spec.com>